

HSX9100 Series

**LOW PHASE NOISE
MULTI-CHANNEL
RF SYNTHESIZERS**



The HSX9100 Series offers exceptional phase noise and spectral purity performance as a multi-channel CW signal source. The compact 1U chassis allows for anywhere from 1 to 4 independently tunable channels (frequency / phase offset / amplitude) to optimize channel density within test system racks where real-estate is often crucial. Application specific frequency options can be configured to cover combinations of 10 MHz to **3 GHz and 6 GHz, or 50 MHz to 12 GHz, 20 GHz, and 40 GHz**. Each broadband channel output provides an accurate dynamic range of up to +20 dBm to -110 dBm. Maury's unique multi-loop architecture provides the ultimate in frequency accuracy, channel-to-channel stability and phase coherency.

HSX9100 Series Multi-Channel RF Synthesizers

PHASE COHERENT CHANNELS: 3 GHz–6 GHz–12 GHz–20 GHz–40 GHz



FULLY INDEPENDENT CHANNELS


Each RF output is driven by a separate, internally loaded synthesizer/attenuator module. Up to 4 independently tunable synthesizers can be specified per 1U chassis allowing for the highest integrated channel density available in its class.

PHASE COHERENT CHANNELS

The HSX9100 Series synthesizers offer the performance benefits of a proprietary multi-loop architecture with a centralized reference distribution subsystem, which maintains a tight phase coherent relationship across all integrated channels.

THE ULTIMATE IN CHANNEL-TO-CHANNEL STABILITY

Different from traditional PLL-based synthesizers, Maury's proprietary multi-loop architecture creates precisely synthesized signals that exhibit both instantaneous and long-term stability. Temperature variations between the channels remain the only contribution to drift. The thermally optimized chassis was specifically developed for maintaining the lowest possible thermal gradients from channel-to-channel. Channel specific thermal monitoring is available for tracking the relative channel temperature of each loaded synthesizer module.

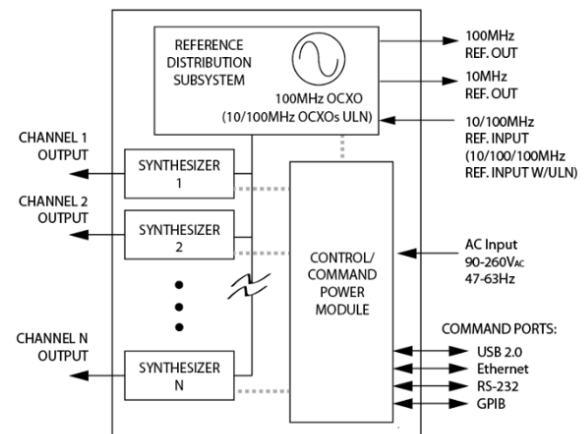

HSX9100 Series Multi-Channel RF Synthesizers

FREQUENCY PERFORMANCE

The specified frequency performance parameters for the HSX9100 Series multi-channel RF synthesizers are fully verified at final performance test and 100% guaranteed for the full warranty period of the product.

PARAMETER	MIN ¹	TYPICAL ²	MAX ¹	COMMENTS
Frequency Range	10 MHz 10 MHz 50 MHz 50 MHz 50 MHz		3 GHz 6 GHz 12 GHz 20 GHz 40 GHz	See page 4 for channel selection options
Switching Speed		5 ms	10 ms	
Frequency Step Size		0.001 Hz		
Phase Offset Resolution		0.1 °		Baseband 750-1500 MHz (N=1) 0.05 ° ±0.05 °
Phase Offset Range		0 to 359.88°, f > 750 MHz		At 100 MHz, 0 to 22.4988°
Internal Timebase Reference Adjust-to-Nominal Aging Rate Temperature Effects		± 1 ppm/yr ≤ ± 1 ppm	+/- 0.2 ppm	Uncertainty 1st year. ±0.5 ppm/yr each subsequent year 0 to 55 °C
10 MHz Reference Output Amplitude Impedance	+2 dBm	50 Ω	+6 dBm	Nominal Nominal
100 MHz Reference Output Amplitude Impedance	+2 dBm	50 Ω	+6 dBm	Nominal Nominal
External Reference Input (standard) Input Frequency Lock Range External Amplitude Impedance Waveform	0 dBm	10/100 MHz ± 4 ppm 50 Ω	+10 dBm	Nominal Sine or square
OPT-ULN Ext. Ref. Input (optional) Input Frequency Range Lock Range External Amplitude Impedance Waveform		10/100/1000 MHz +/- 0.5 ppm +10 dBm 50 Ω		Nominal Nominal Sine or square

¹ All MIN/ MAX (Minimum/ Maximum) performance parameters are guaranteed and 100% verified during final performance test.

² Typical performance is "by design" and consistent with field performance data.

HSX9100 Series Multi-Channel RF Synthesizers

HSX9100 SERIES CONFIGURATION GUIDE

The HSX9100 Series synthesizer platform is designed to be user/application defined. Follow four easy steps to determine the part number with the required options.

STEP 1: SELECT TOTAL NUMBER OF CHANNELS

Select the base part number, strictly calling out the total number of channels to be loaded into the multi-channel chassis.

No. Channels	1	2	3	4
Part Number	HSX9101A	HSX9102A	HSX9103A	HSX9104A

STEP 2: SELECT CHANNEL FREQUENCY OPTIONS

Select any combination of channel frequency options. Note that the total number of channels specified here must equal the number of channels selected under STEP 1.

Frequency Range	Number of Channels per Frequency Range			
	1x	2x	3x	4x
10 MHz – 3 GHz	OPT-103-X	OPT-203-X	OPT-303-X	OPT-403-X
10 MHz – 6 GHz	OPT-106-X	OPT-206-X	OPT-306-X	OPT-406-X
50 MHz – 12 GHz	OPT-112-X	OPT-212-X	OPT-312-X	OPT-412-X
50 MHz – 20 GHz	OPT-120-X	OPT-220-X	OPT-320-X	OPT-420-X
50 MHz – 40 GHz	OPT-140-X	OPT-240-X	N/A	N/A

STEP 3: SELECT OPTIONS AND ACCESSORIES

TYPE	Part Number	Description
OPTION	OPT-ULN	Ultra-Low Noise: improves close-in phase noise (offsets up to ≤ 100 Hz) and expands external reference options to include 1000 MHz
ACCESSORY	RACK-1U	19" Rack Mount Bracket Kit, 90° rear bracket, 24 in max. depth
ACCESSORY	RACK2-1U	19" Rack Mount Bracket Kit, straight rear bracket, 24 in max. depth
ACCESSORY	RACK-1U-L	19" Rack Mount Bracket Kit, 90° rear bracket, 29 in max. depth
ACCESSORY	RACK2-1U-L	19" Rack Mount Bracket Kit, straight rear bracket, 29 in max. depth
ACCESSORY	CASE-1U	Carrying/storage case

PART NUMBER EXAMPLE

Ordering a 4 channel HSX9100 synthesizer with 1x 10 MHz-6 GHz channel, 2x 50 MHz-12 GHz channels, and 1x 50 MHz-20 GHz channel would result in the following configuration:

Part Number	Description
HSX9104A	4 channel HSX9100 RF Synthesizer
Options	
OPT-106-X	1x 6 GHz Channel
OPT-212-X	2x 12 GHz Channels
OPT-120-X	1x 20 GHz Channel

HSX9100 Series Multi-Channel RF Synthesizers

3 GHz / 6 GHz AMPLITUDE PERFORMANCE

This section contains performance specifications and data for OPT-n03-X (3 GHz) and OPT-n06-X (6 GHz) channels. The specified parameters for the HSX9100 Series RF Synthesizers are fully verified at final performance test and 100% guaranteed for the full warranty period of the product.

PARAMETER	MIN ¹	TYPICAL ²	MAX ¹	COMMENTS		
Output Power (Calibrated) 10 MHz ≤ f ≤ 200 MHz 200 MHz < f ≤ 5.0 GHz 5.0 GHz < f ≤ 6.0 GHz	-110 dBm -110 dBm -110 dBm		+15 dBm +18 dBm +16 dBm	Settable from -115 dBm to +20 dBm		
Maximum Output Power (unleveled) 10 MHz ≤ f ≤ 6.0 GHz		See plot on page 6				
Resolution		0.01 dB				
Connector		50 Ω		SMA (Jack)		
Switching Speed (Amplitude)		5 ms				
Absolute Level Accuracy 10 MHz ≤ f ≤ 6.0 GHz	MAX to +10 dBm +10 to -10 dBm -10 to -60 dBm -60 to -90 dBm <-90 dBm		± 1.0 dB ± 0.7 dB ± 1.0 dB ± 1.3 dB ± 2.0 dB	20 °C to 30 °C ambient temperature		
SSB Phase Noise f _c : Output +10 dBm	1 Hz 10 MHz 100 MHz 500 MHz 1 GHz 3 GHz 6 GHz	Offset (typical) 10 kHz ≤ -159 dBc/Hz ≤ -154 dBc/Hz ≤ -144 dBc/Hz ≤ -142 dBc/Hz ≤ -133 dBc/Hz ≤ -127 dBc/Hz	1 MHz ≤ -160 dBc/Hz ≤ -150 dBc/Hz ≤ -139 dBc/Hz ≤ -133 dBc/Hz ≤ -128 dBc/Hz ≤ -123 dBc/Hz	1 Hz ≤ -77 dBc/Hz ≤ -57 dBc/Hz ≤ -43 dBc/Hz ≤ -37 dBc/Hz ≤ -26 dBc/Hz ≤ -20 dBc/Hz	Offset (max) 10 kHz ≤ -158 dBc/Hz ≤ -151 dBc/Hz ≤ -140 dBc/Hz ≤ -139 dBc/Hz ≤ -128 dBc/Hz ≤ -121 dBc/Hz	1 MHz ≤ -159 dBc/Hz ≤ -148 dBc/Hz ≤ -137 dBc/Hz ≤ -131 dBc/Hz ≤ -125 dBc/Hz ≤ -119 dBc/Hz
OPT-ULN SSB Phase Noise f _c : Output +10 dBm	1 Hz 100 MHz 500 MHz 1 GHz 3 GHz 6 GHz	Offset (typical) 10 kHz ≤ -156 dBc/Hz ≤ -146 dBc/Hz ≤ -144 dBc/Hz ≤ -138 dBc/Hz ≤ -131 dBc/Hz	1 MHz ≤ -150 dBc/Hz ≤ -139 dBc/Hz ≤ -133 dBc/Hz ≤ -128 dBc/Hz ≤ -122 dBc/Hz			
Harmonics³ 10 MHz ≤ f ≤ 6.0 GHz		(2ND / 3RD) -35 / -45 dBc	(2ND / 3RD) -20 / -30 dBc	Output set to +10 dBm		
Sub-Harmonics⁴ 10 MHz ≤ f ≤ 1.5 GHz 1.5 GHz < f ≤ 3.0 GHz 3.0 GHz < f ≤ 6.0 GHz		< -70 dBc -70 dBc -60 dBc	< -55 dBc -55 dBc -45 dBc	Output set to +10 dBm		
Non-Harmonics / Spurious⁴ 10 MHz ≤ f ≤ 1.5 GHz 1.5 GHz < f ≤ 3.0 GHz 3.0 GHz < f ≤ 6.0 GHz		-88 dBc -83 dBc	-76 dBc -70 dBc -64 dBc	Output set to 10 dBm		

¹ All MIN/ MAX (Minimum/ Maximum) performance parameters are guaranteed and 100% verified during final performance test.

² Typical performance is "by design" and consistent with field performance data.


³ RBW: 1.8 kHz, VBW: 1.8 kHz, Span 1 MHz

⁴ RBW: 10 kHz, VBW: 10 kHz, Span 10 MHz

HSX9100 Series Multi-Channel RF Synthesizers


3 GHz / 6 GHz MAXIMUM OUTPUT POWER

The data shown here represents measured unleveled performance.

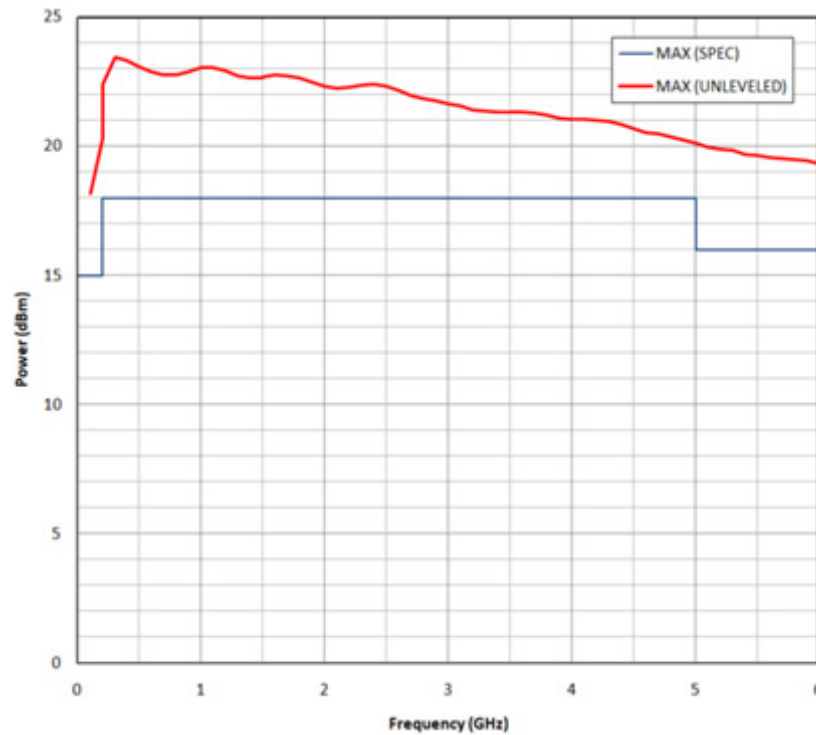

3 GHz / 6 GHz HARMONICS & SUB-HARMONICS

Harmonic and sub-harmonic measured data taken at +10 dBm carrier power level

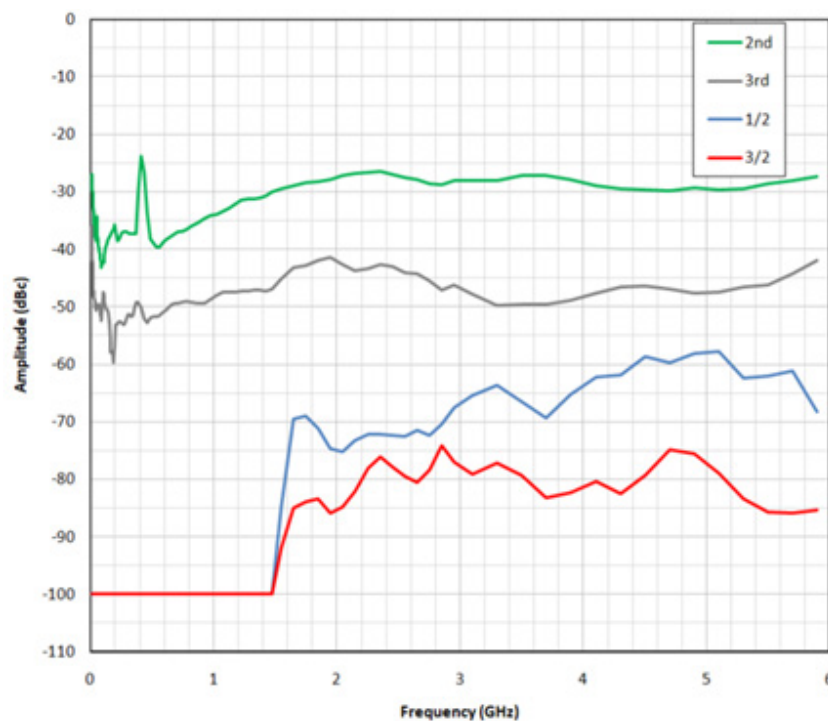

HSX9100 Series Multi-Channel RF Synthesizers

12 GHz / 20 GHz AMPLITUDE PERFORMANCE

This section contains performance specifications and data for OPT-n12-X (12 GHz), and OPT-n20-X (20 GHz) channels. The specified parameters for the HSX9100 Series RF Synthesizers are fully verified at final performance test and 100% guaranteed for the full warranty period of the product.

PARAMETER	MIN ¹	TYPICAL ²	MAX ¹	COMMENTS		
Output Power (Calibrated) 50 MHz ≤ f ≤ 16.0 GHz 16.0 GHz < f ≤ 20.0 GHz	-50 dBm -50 dBm		+18 dBm +16 dBm	Settable from -60 dBm to +20 dBm		
Maximum Output Power (unleveled) 50 MHz ≤ f ≤ 20 GHz		See plot on page 8				
Resolution		0.01 dB				
Connector		50 Ω		OPT-n12-X: SMA (Jack) OPT-n20-X: Super SMA (Jack)		
Switching Speed (Amplitude)		5 ms				
Absolute Level Accuracy 50 MHz ≤ f ≤ 20 GHz	MAX to +10 dBm +10 to -10 dBm -10 to -50 dBm		± 1.4 dB ± 0.7 dB ± 1.4 dB	20 °C to 30 °C ambient temperature		
SSB Phase Noise f _c : Output +10 dBm	1 Hz	Offset (typical) 10 kHz	1 MHz	1 Hz	Offset (max) 10 kHz	1 MHz
50 MHz	≤ -73 dBc/Hz	≤ -158 dBc/Hz	≤ -155 dBc/Hz	≤ 63 dBc/Hz	≤ -155 dBc/Hz	≤ -154 dBc/Hz
100 MHz	≤ -69 dBc/Hz	≤ -154 dBc/Hz	≤ -150 dBc/Hz	≤ -57 dBc/Hz	≤ -151 dBc/Hz	≤ -148 dBc/Hz
500 MHz	≤ -55 dBc/Hz	≤ -144 dBc/Hz	≤ -139 dBc/Hz	≤ -43 dBc/Hz	≤ -140 dBc/Hz	≤ -137 dBc/Hz
1 GHz	≤ -48 dBc/Hz	≤ -142 dBc/Hz	≤ -133 dBc/Hz	≤ -37 dBc/Hz	≤ -139 dBc/Hz	≤ -131 dBc/Hz
3 GHz	≤ -38 dBc/Hz	≤ -133 dBc/Hz	≤ -128 dBc/Hz	≤ -26 dBc/Hz	≤ -128 dBc/Hz	≤ -125 dBc/Hz
6 GHz	≤ -32 dBc/Hz	≤ -127 dBc/Hz	≤ -123 dBc/Hz	≤ -20 dBc/Hz	≤ -121 dBc/Hz	≤ -119 dBc/Hz
12 GHz	≤ -27 dBc/Hz	≤ -121 dBc/Hz	≤ -117 dBc/Hz	≤ -15 dBc/Hz	≤ -116 dBc/Hz	≤ -115 dBc/Hz
20 GHz	≤ -21 dBc/Hz	≤ -116 dBc/Hz	≤ -108 dBc/Hz	≤ -10 dBc/Hz	≤ -114 dBc/Hz	≤ -106 dBc/Hz
OPT-ULN SSB Phase Noise f _c : Output +10 dBm	1 Hz	Offset (typical) 10 kHz	1 MHz			
50 MHz	≤ -96 dBc/Hz	≤ -157 dBc/Hz	≤ -155 dBc/Hz			
100 MHz	≤ -90 dBc/Hz	≤ -156 dBc/Hz	≤ -150 dBc/Hz			
500 MHz	≤ -73 dBc/Hz	≤ -146 dBc/Hz	≤ -139 dBc/Hz			
1 GHz	≤ -69 dBc/Hz	≤ -144 dBc/Hz	≤ -133 dBc/Hz			
3 GHz	≤ -59 dBc/Hz	≤ -138 dBc/Hz	≤ -128 dBc/Hz			
6 GHz	≤ -51 dBc/Hz	≤ -131 dBc/Hz	≤ -122 dBc/Hz			
12 GHz	≤ -46 dBc/Hz	≤ -126 dBc/Hz	≤ -116 dBc/Hz			
20 GHz	≤ -38 dBc/Hz	≤ -119 dBc/Hz	≤ -110 dBc/Hz			
Harmonics³ 50 MHz < f ≤ 20 GHz		(2ND / 3RD) -30 / -35 dBc	(2ND / 3RD) -20 / -30 dBc	Output set to +10 dBm		
Sub-Harmonics⁴ 50 MHz ≤ f ≤ 1.5 GHz 1.5 GHz < f ≤ 3.0 GHz 3.0 GHz < f ≤ 6.0 GHz 6.0 GHz < f ≤ 12.0 GHz 12.0 GHz < f ≤ 20.0 GHz		< -70 dBc -70 dBc -60 dBc -70 dBc -60 dBc	< -55 dBc -55 dBc -45 dBc -60 dBc -50 dBc	Output set to +10 dBm		
Non-Harmonics / Spurious⁴ 50 MHz ≤ f ≤ 750 MHz 750 MHz < f ≤ 1.5 GHz 1.5 GHz < f ≤ 3.0 GHz 3.0 GHz < f ≤ 6.0 GHz 6.0 GHz < f ≤ 12.0 GHz 12.0 GHz < f ≤ 20.0 GHz		< -82 dBc -82 dBc -76 dBc -70 dBc -64 dBc -58 dBc	-76 dBc -70 dBc -64 dBc -58 dBc -52 dBc	Output set to +10 dBm		

¹ All MIN/ MAX (Minimum/ Maximum) performance parameters are guaranteed and 100% verified during final performance test.

² Typical performance is "by design" and consistent with field performance data.


³ RBW: 1.8 kHz, VBW: 1.8 kHz, Span 1 MHz

⁴ RBW: 10 kHz, VBW: 10 kHz, Span 10 MHz

HSX9100 Series Multi-Channel RF Synthesizers


12 GHz / 20 GHz MAXIMUM OUTPUT POWER

The data shown here represents measured unleveled performance.

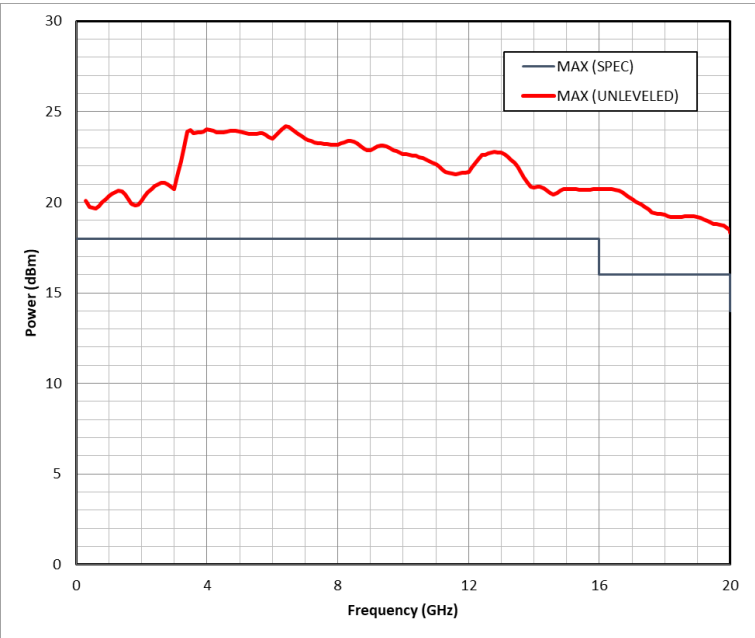

12 GHz / 20 GHz HARMONICS & SUB-HARMONICS

Harmonic and sub-harmonic measured data taken at +10 dBm carrier power level.

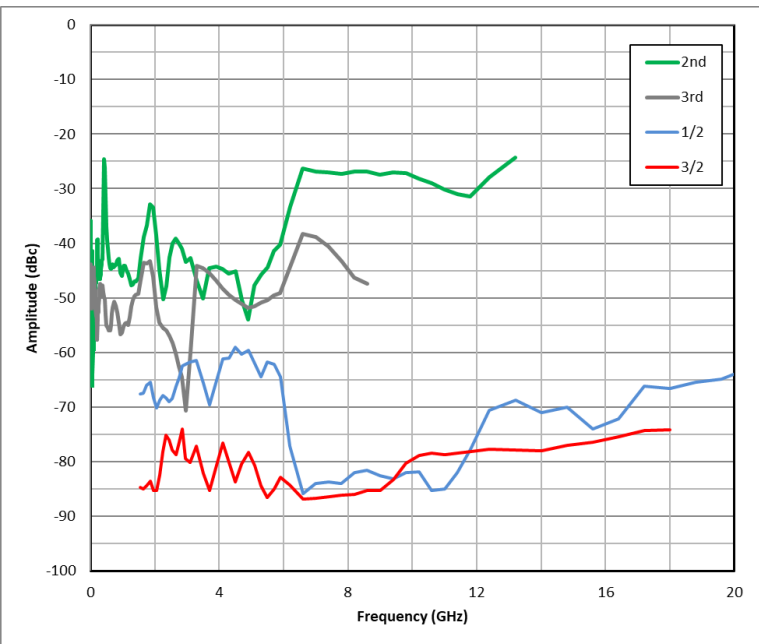

HSX9100 Series Multi-Channel RF Synthesizers

40 GHz AMPLITUDE PERFORMANCE

This section contains performance specifications for channels that operate to 40 GHz. The specified parameters for the HSX9100 Series RF Synthesizers are fully verified at final performance test and 100% guaranteed for the full warranty period of the product.

PARAMETER	MIN ¹	TYPICAL ²	MAX ¹	COMMENTS		
Output Power (Calibrated) 50 MHz ≤ f ≤ 35.0 GHz 35.0 GHz < f ≤ 40.0 GHz	0 dBm 0 dBm		+18 dBm +13 dBm	Settable from -5 dBm to +25 dBm		
Maximum Output Power (unleveled) 50 MHz ≤ f ≤ f ≤ 40.0 GHz		See plot on page 10				
Resolution		0.01 dB				
Connector		50 Ω		2.92 mm (Jack)		
Switching Speed (Amplitude)		5 ms				
Absolute Level Accuracy 50 MHz ≤ f ≤ 35.0 GHz 35.0 GHz < f ≤ 40.0 GHz	+18 to 0 dBm +12 to 0 dBm		± 0.7 dB ± 1.0 dB	20 °C to 30 °C ambient temperature		
SSB Phase Noise f _c : Output +10 dBm	1 Hz 50 MHz ≤ -73 dBc/Hz 100 MHz ≤ -69 dBc/Hz 500 MHz ≤ -55 dBc/Hz 1 GHz ≤ -48 dBc/Hz 3 GHz ≤ -38 dBc/Hz 6 GHz ≤ -32 dBc/Hz 12 GHz ≤ -27 dBc/Hz 24 GHz ≤ -21 dBc/Hz 40 GHz ≤ -15 dBc/Hz	Offset (typical) 10 kHz ≤ -158 dBc/Hz ≤ -155 dBc/Hz ≤ -146 dBc/Hz ≤ -142 dBc/Hz ≤ -133 dBc/Hz ≤ -127 dBc/Hz ≤ -121 dBc/Hz ≤ -116 dBc/Hz ≤ -110 dBc/Hz	1 MHz ≤ -155 dBc/Hz ≤ -150 dBc/Hz ≤ -139 dBc/Hz ≤ -133 dBc/Hz ≤ -128 dBc/Hz ≤ -123 dBc/Hz ≤ -117 dBc/Hz ≤ -108 dBc/Hz ≤ -102 dBc/Hz	1 Hz ≤ -63 dBc/Hz ≤ -57 dBc/Hz ≤ -43 dBc/Hz ≤ -37 dBc/Hz ≤ -26 dBc/Hz ≤ -20 dBc/Hz ≤ -15 dBc/Hz ≤ -10 dBc/Hz ≤ -4 dBc/Hz	Offset (max) 10 kHz ≤ -155 dBc/Hz ≤ -154 dBc/Hz ≤ -144 dBc/Hz ≤ -139 dBc/Hz ≤ -128 dBc/Hz ≤ -121 dBc/Hz ≤ -116 dBc/Hz ≤ -114 dBc/Hz ≤ -108 dBc/Hz	1 MHz ≤ -154 dBc/Hz ≤ -148 dBc/Hz ≤ -137 dBc/Hz ≤ -131 dBc/Hz ≤ -125 dBc/Hz ≤ -119 dBc/Hz ≤ -115 dBc/Hz ≤ -106 dBc/Hz ≤ -100 dBc/Hz
OPT-ULN SSB Phase Noise f _c : Output +10 dBm	1 Hz 50 MHz ≤ -96 dBc/Hz 100 MHz ≤ -90 dBc/Hz 500 MHz ≤ -73 dBc/Hz 1 GHz ≤ -69 dBc/Hz 3 GHz ≤ -59 dBc/Hz 6 GHz ≤ -51 dBc/Hz 12 GHz ≤ -46 dBc/Hz 24 GHz ≤ -38 dBc/Hz	Offset (typical) 10 kHz ≤ -157 dBc/Hz ≤ -156 dBc/Hz ≤ -146 dBc/Hz ≤ -144 dBc/Hz ≤ -138 dBc/Hz ≤ -131 dBc/Hz ≤ -126 dBc/Hz ≤ -119 dBc/Hz	1 MHz ≤ -155 dBc/Hz ≤ -150 dBc/Hz ≤ -139 dBc/Hz ≤ -133 dBc/Hz ≤ -128 dBc/Hz ≤ -122 dBc/Hz ≤ -116 dBc/Hz ≤ -110 dBc/Hz			
Harmonics³ 50 MHz < f ≤ 25.0 GHz > 25.0 GHz			(2ND / 3RD) -30 / -35 dBc -30 / -35 dBc	(2ND / 3RD) -20 / -30 dBc	Output set to +10 dBm	
Sub-Harmonics³ 50 MHz ≤ f ≤ 1.5 GHz 1.5 GHz < f ≤ 3.0 GHz 3.0 GHz < f ≤ 6.0 GHz 6.0 GHz < f ≤ 12.0 GHz 12.0 GHz < f ≤ 24.0 GHz 24.0 GHz < f ≤ 40.0 GHz			< -70 dBc -70 dBc -60 dBc -70 dBc -60 dBc -60 dBc	< -55 dBc -55 dBc -45 dBc -60 dBc -50 dBc -60 dBc	Output set to +10 dBm	
Non-Harmonics / Spurious⁴ 50 MHz ≤ f ≤ 750 MHz 750 MHz < f ≤ 1.5 GHz 1.5 GHz < f ≤ 2.0 GHz 2.0 GHz < f ≤ 6.0 GHz 6.0 GHz < f ≤ 12.0 GHz 12.0 GHz < f ≤ 24.0 GHz 24.0 GHz < f ≤ 40.0 GHz			< -82 dBc -82 dBc -76 dBc -70 dBc -64 dBc -58 dBc -52 dBc	-76 dBc -70 dBc -64 dBc -58 dBc -52 dBc -46 dBc	Output set to +10 dBm	

¹ All MIN/ MAX (Minimum/ Maximum) performance parameters are guaranteed and 100% verified during final performance test.


² Typical performance is "by design" and consistent with field performance data. ³ RBW: 1.8 kHz, VBW: 1.8 kHz, Span 1 MHz

⁴ RBW: 10 kHz, VBW: 10 kHz, Span 10 MHz

HSX9100 Series Multi-Channel RF Synthesizers


40 GHz MAXIMUM OUTPUT POWER

The data shown here represents measured unleveled performance.

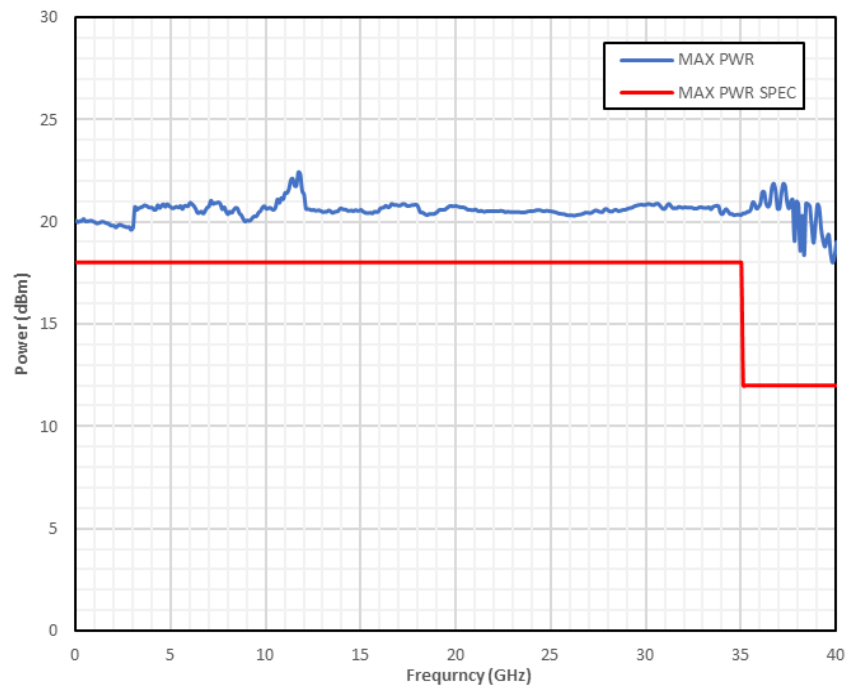


40 GHz HARMONICS & SUB-HARMONICS

Harmonic and sub-harmonic measured data taken at +10 dBm carrier power level.

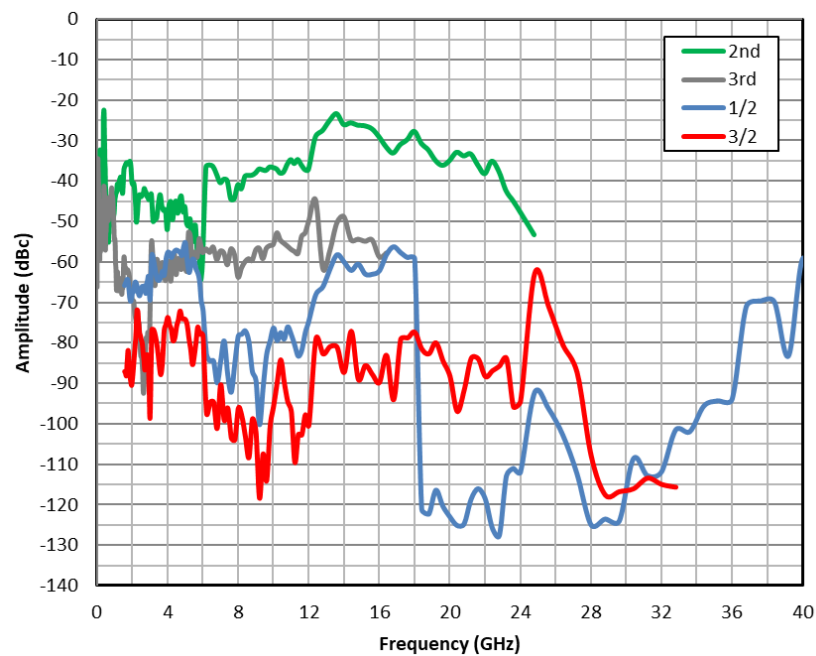


HSX9100 Series Multi-Channel RF Synthesizers

20 GHz MEASURED PHASE NOISE PERFORMANCE ($P_{out} = +10\text{ dBm}$)

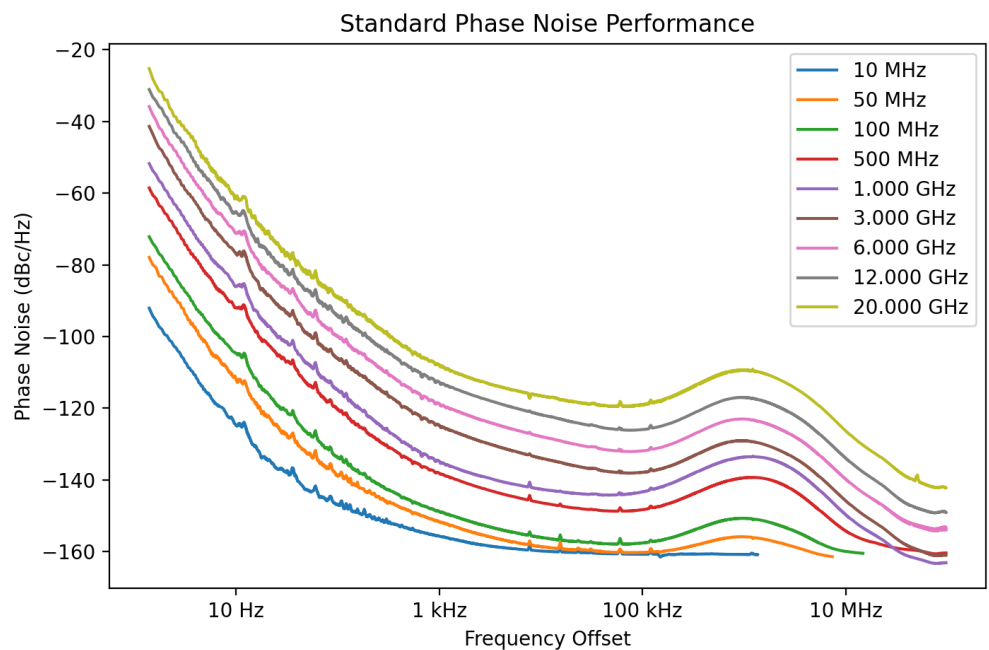


40 GHz OPT-ULN MEASURED PHASE NOISE PERFORMANCE ($P_{out} = +10\text{ dBm}$)

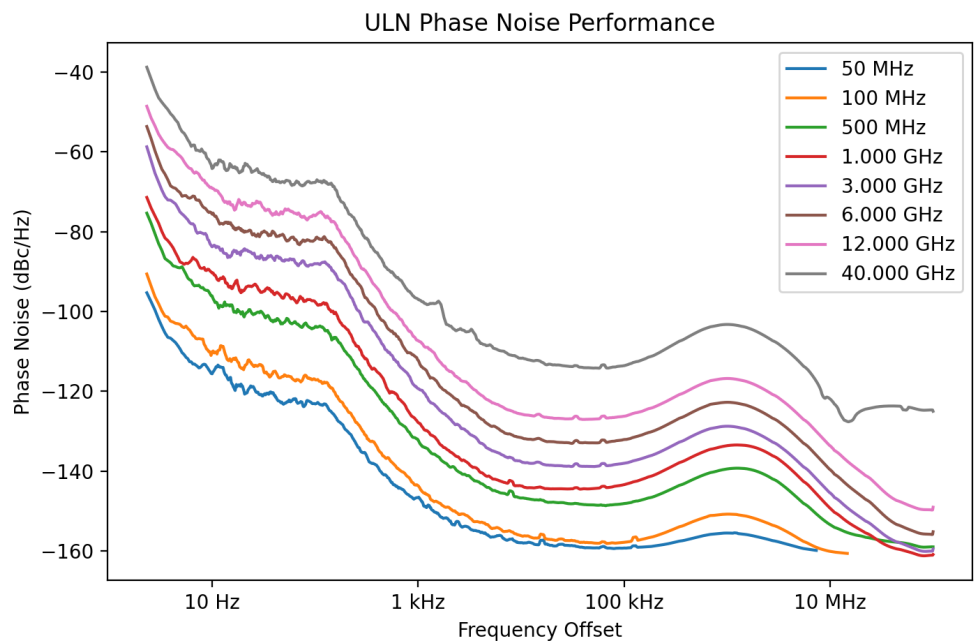

HSX9100 Series Multi-Channel RF Synthesizers

STANDARD VS OPT-ULN REFERENCE MEASURED PHASE NOISE COMPARISON ($P_{out} = +10 \text{ dBm}$)

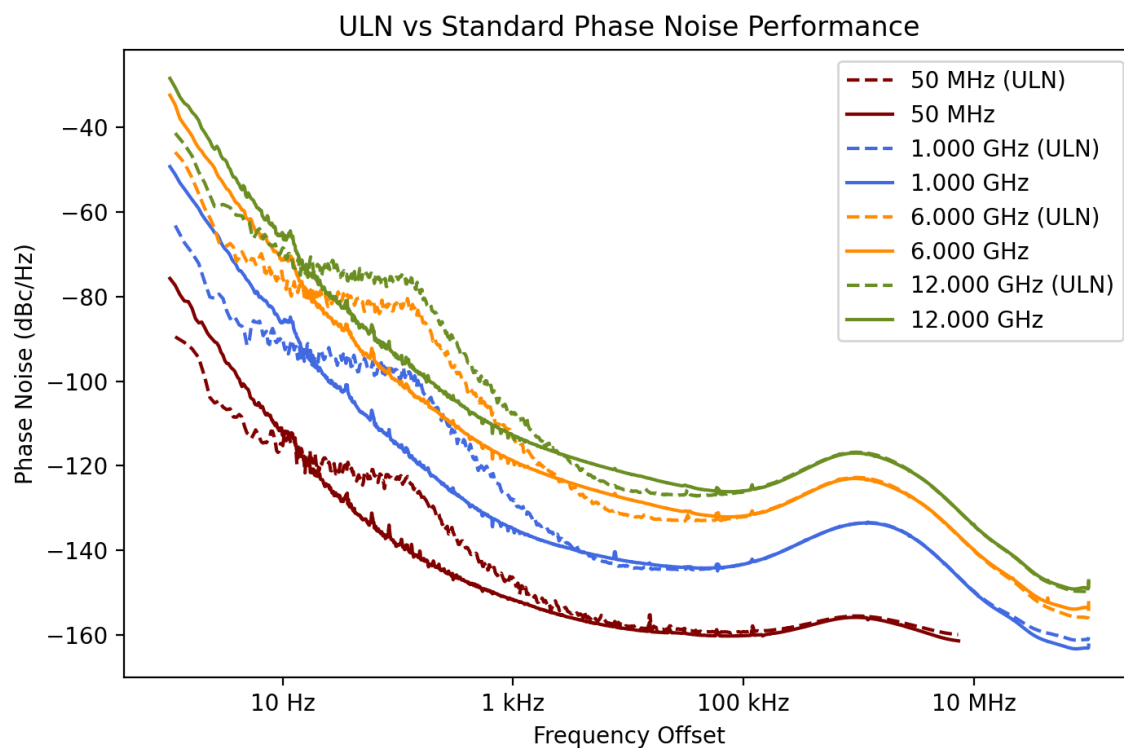

HSX9100 Series RF Synthesizers

ENVIRONMENTAL SPECIFICATIONS

THIS INSTRUMENT IS DESIGNED FOR INDOOR USE ONLY.

Environmental specifications are based on component margins, thermal verification testing and current draw tests. Production unit performance is verified at room temperature.

PARAMETER	MIN	TYPICAL ¹	MAX	COMMENTS
Operating Temperature	0 °C		+50 °C	
Temperature Monitor Range	-40 °C		+85 °C	Absolute, channel dedicated sensor
AC Power Supply				
Rated Voltage	100 VAC		240 VAC	
Voltage Range	90 VAC		264 VAC	
Rated Frequency	50 Hz		60 Hz	
Frequency Range	47Hz		63 Hz	
AC Power Consumption				Approximate values. May vary with loading and temperature.
Chassis		14-24 W		Chassis includes reference and communication module.
3 or 6 GHz Channel (each)		17 W		HSX9003 (3 channel) Example:
12 GHz Channel (each)		24 W		14 W + (17 W * 3) = 65 W Total
20 GHz Channel (each)		24 W		
40 GHz Channel (each)		49 W		
Warm-Up Time		10 min		20 °C (ambient temp. dependent)

¹ Typical performance is "by design" and consistent with field performance data.

DESCRIPTION	Recommended Environmental Conditions
Operating Environment	
Humidity	Relative humidity 15% to 95%, <29 °C (non-condensing)
Altitude	0 to 3,048 m (0 to 10,000 feet)
Vibration	0.21 g RMS maximum, 5 Hz to 500 Hz
Storage (Non-Operating)	
Temperature	-10 °C to + 60 °C
Humidity	Relative humidity 0% to 90%, <40 °C (non-condensing)
Altitude	0 to 15,240 m (0 to 50,000 feet)
Vibration	0.5 g RMS maximum, 5Hz to 500Hz


REGULATORY COMPLIANCE

CE compliance with the following European Union directives
 Low Voltage Directive EU 2014/35
 Electromagnetic Compatibility Directive (EMC) EU 2014/30
 RoHS Directive EU 2015/863, WEEE Directive EU 2012/19

HSX9100 Series Multi-Channel RF Synthesizers

MECHANICAL CONFIGURATION

The HSX9100 Series comes in a 1U high, rack mountable chassis. The example shown is of a 4 channel unit (front panel configuration may vary). A universal rack mount bracket kit is an available accessory (Part No.: RACK-1U , RACK-1U-L, RACK2-1U, RACK2-1U-L). Mechanical dimensions are listed in inches (and millimeters).

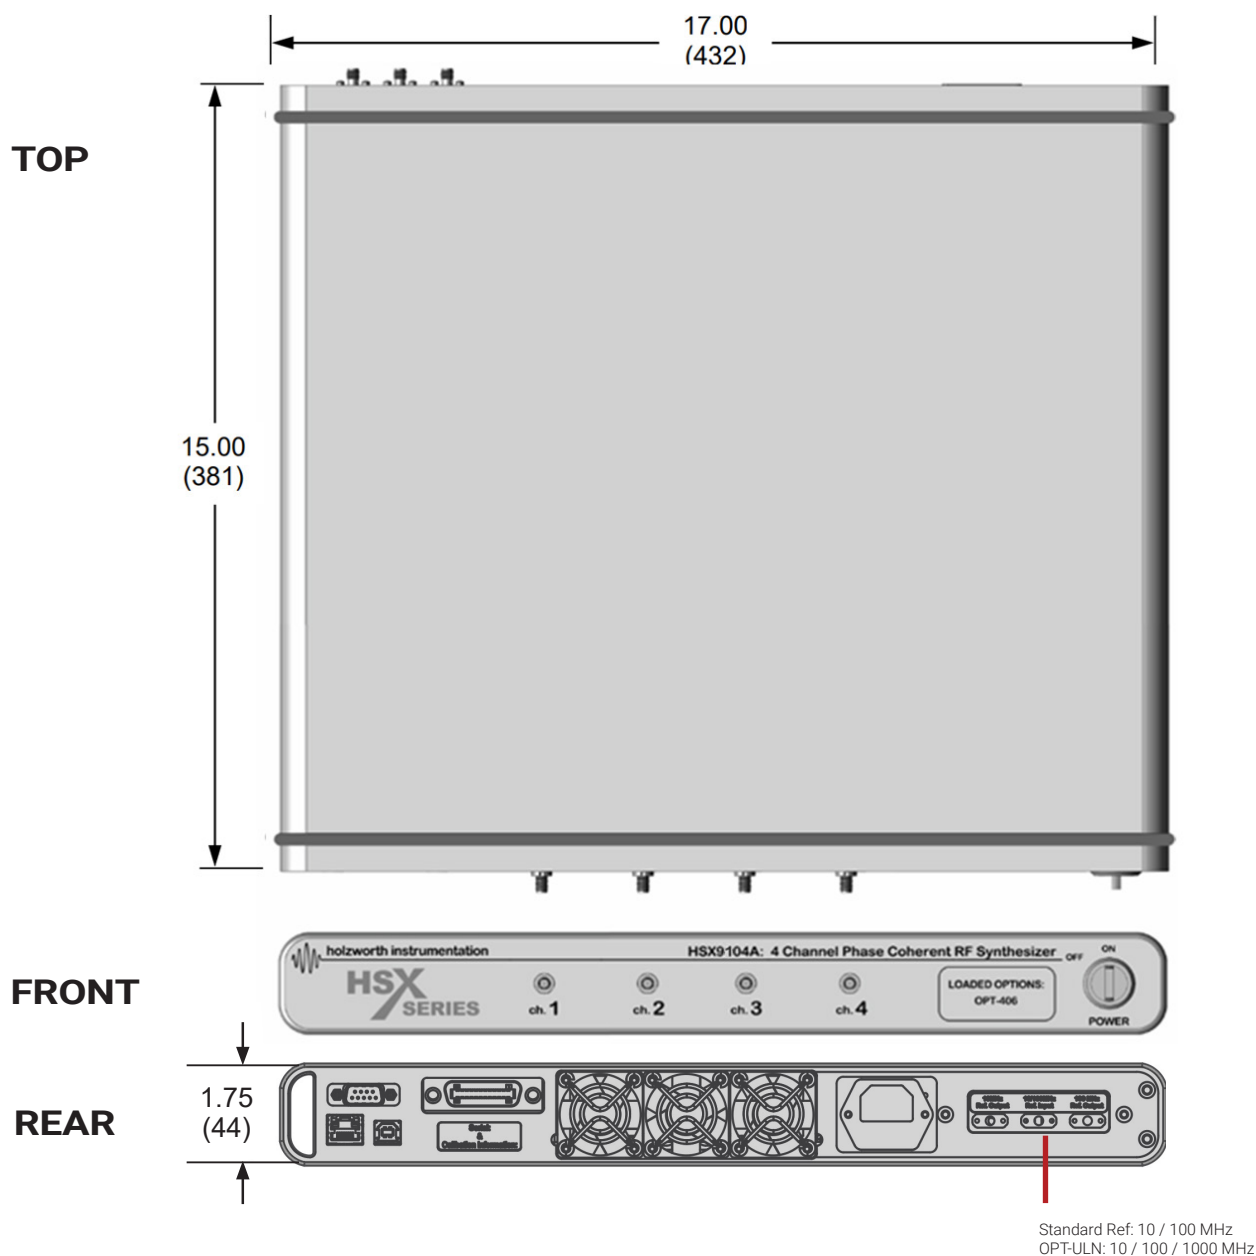

HSX9100 Series Multi-Channel RF Synthesizers

CONNECTORS and PHYSICAL SPECIFICATIONS

FULLY INDEPENDENT CHANNELS

DESCRIPTION	Configuration
RF Output(s)	SMA-J, 50 Ω : OPT-n03-X, OPT-n06-X, OPT-n12-X (n = number of channels = number of connectors)
Connector Type	Super SMA-J, 50 Ω : OPT-n20-X (n = number of channels = number of connectors)
	2.92mm-J, 50 Ω : OPT-n40-X (n = number of channels = number of connectors)

REAR PANEL

DESCRIPTION	Configuration
Reference Output Port	
Connector Type	SMA, 50 Ω
Output Frequency	10 MHz \pm 10 Hz and 100 MHz \pm 100 Hz
Output Level	+2 dBm to +6 dBm
Output Waveform	Sinusoid
Reference Input Port	
Connector Type	SMA, 50 Ω
Input Frequency	10/100 MHz
Input Frequency (OPT-ULN)	10/100/1000 MHz
Input Level	0 dBm to +10 dBm (sinusoid or square)
AC Power Input	
Connector Type	IEC 320-C13
AC Input Rating	100-240 VAC, 47-63 Hz. Specify country at time of order for proper power cord.
Data I/O Interface	
Connectivity	USB B-Type (virtual COM port), Ethernet, RS-232, GPIB

PHYSICAL

Dimensions (L x W x H)	1U high, 19" rack mount: 15 in x 17 in x 1.75 in (381 mm x 431.8 mm x 44.5 mm)
Weight	25 lbs. (11.34 kilograms) MAXIMUM

HSX9100 Series Multi-Channel RF Synthesizers

INCLUDED HARDWARE AND CERTIFICATIONS

Each product delivery includes following hardware and certifications.

DESCRIPTION
HSX9100 SERIES SYNTHESIZER
AC Power Cord (7 ft/2.1 m) ¹
Ethernet Cable (10 ft/3 m)
USB Cable (6 ft/1.8 m)
CALIBRATION CERTIFICATION


¹ Specify final country of destination for shipment with proper power cord



HSX9100 Series Multi-Channel RF Synthesizers

INTERFACE - GUI

The HSX9100 Series hardware utilizes a virtual front panel as the control interface. Each unit comes with an open license to operate the application on any standard PC, including those equipped with touch screen monitors. The C++ based application GUI compliments the driver free instrument by being extremely reliable. The units can also be directly accessed via any data I/O interface for control via MATLAB™, LabVIEW™, C++ code, Python, VB code, etc.

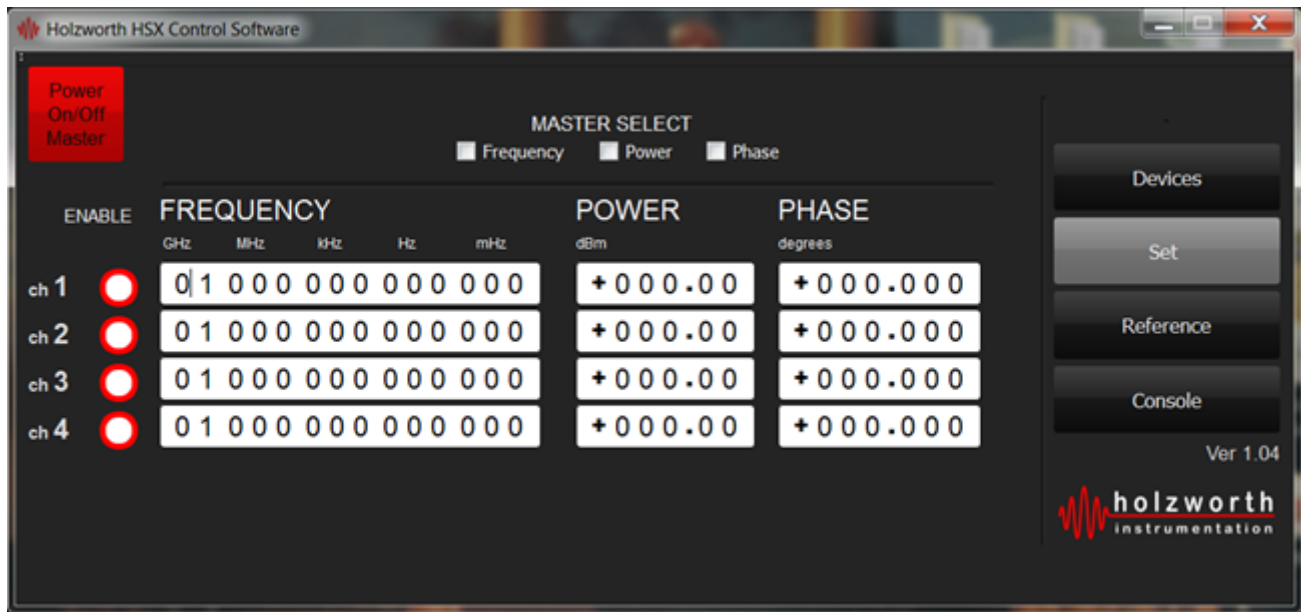

HSX9100 Series Multi-Channel RF Synthesizers

WARRANTY

All Holzworth HSX9100 Series synthesizer products come with a standard 1 year 100% product warranty covering manufacturing defects. All product repairs and maintenance must be performed by Holzworth Instrumentation. Holzworth reserves the right to invalidate the warranty for any products that have been tampered with or used improperly. Refer to Holzworth Terms & Conditions of Sales for more details.

Holzworth products are proudly designed and assembled in the USA.

CONTACT INFORMATION

Contact Holzworth directly for a product quotation, a product demonstration, or for technical inquiries.

Holzworth Sales Support

Phone: +1.303.325.3473

Holzworth Technical Support

Phone: +1.303.325.3473

Email: support@holzworth.com



| 9 Entin Road, Suite 101, Parsippany, NJ 07054 | +1 973 386 9696 | F: +1 973 386 9191

| maurymw.com | H/HSX Series/0825/EN

| Note: Specifications, terms and conditions are subject to change without prior notice.

| © Copyright 2025. All rights reserved.