

NC3600 Series

High ENR Noise Source

200 MHz to 45 GHz



High ENR Coaxial Noise Sources

The NC3600 offers a High ENR Output Over a Wide Frequency Range. The NC3600 Series coaxial noise sources are an excellent choice for applications requiring high ENR, such as ATE, radiometer, and radar systems.

An SMA male connector is standard for the RF output and feed thrus for bias input. SMA female is an option. Custom frequencies and flatness available. Contact the factory with your request.

Applications

- Radar systems
- High NF device measurements
- Automated test equipment (ATE)


Specifications

Standard input voltage	+15V
Typical current	100 mA
Calibration	Every 1 GHz


Model	Frequency Range (GHz)	Noise Output ENR (dB)	Flatness (dB)	Connector
NC3608	2 GHz -18 GHz	>40	+/- 1.5	SMA
NC3609	0.2 GHz-18 GHz	>40	+/- 1.5	SMA
NC3610	18-40 GHz	>33	+/- 2.0	2.92 mm
NC3611	2 – 40 GHz	>30	+/- 2.0	2.92 mm
NC3612	20 – 45 GHz	>30	+/- 3.0	2.4 mm

Option Number	Description
NC36opt01	Female output connector
NC36opt02	+28VDC Input Voltage
NC36opt03	BNC DC-Bias Connector

NC3600 Series Dimensions (inches)

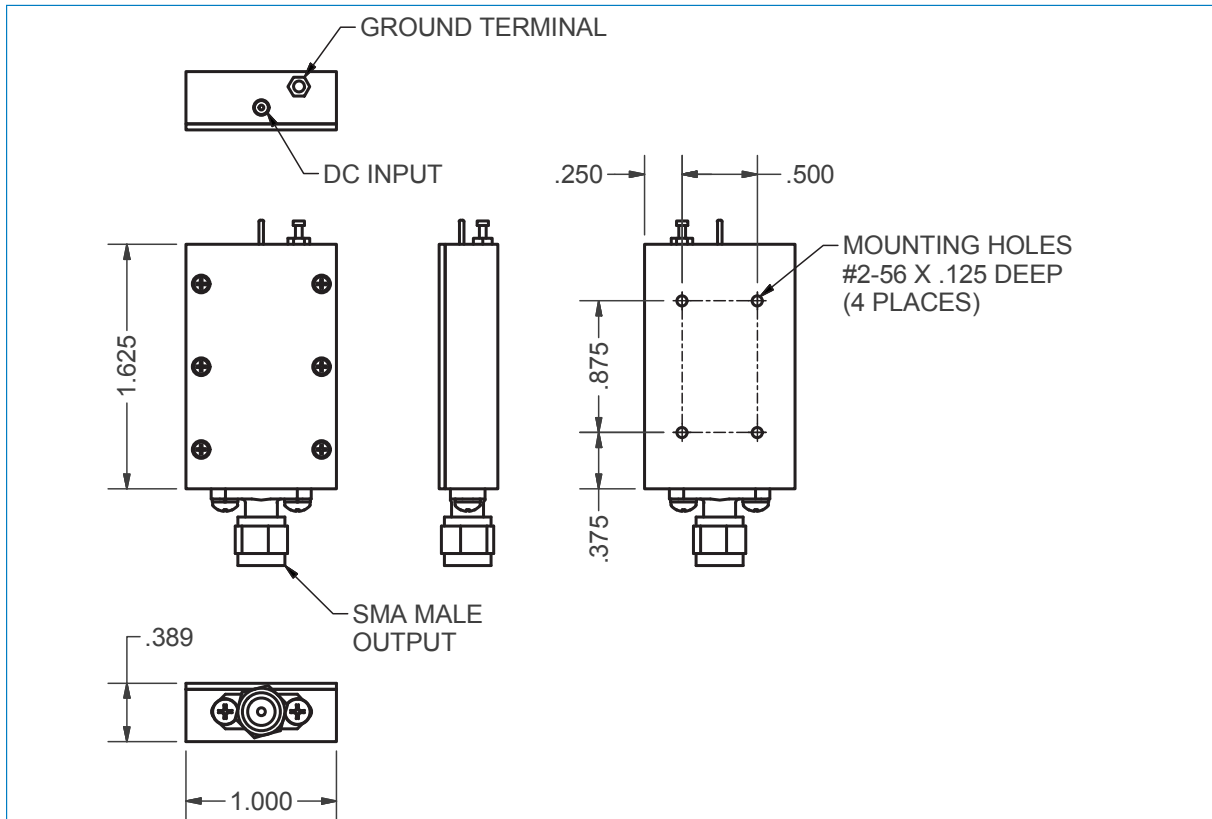

NC3600 Series Dimensions (inches) Shown with NC36opt03

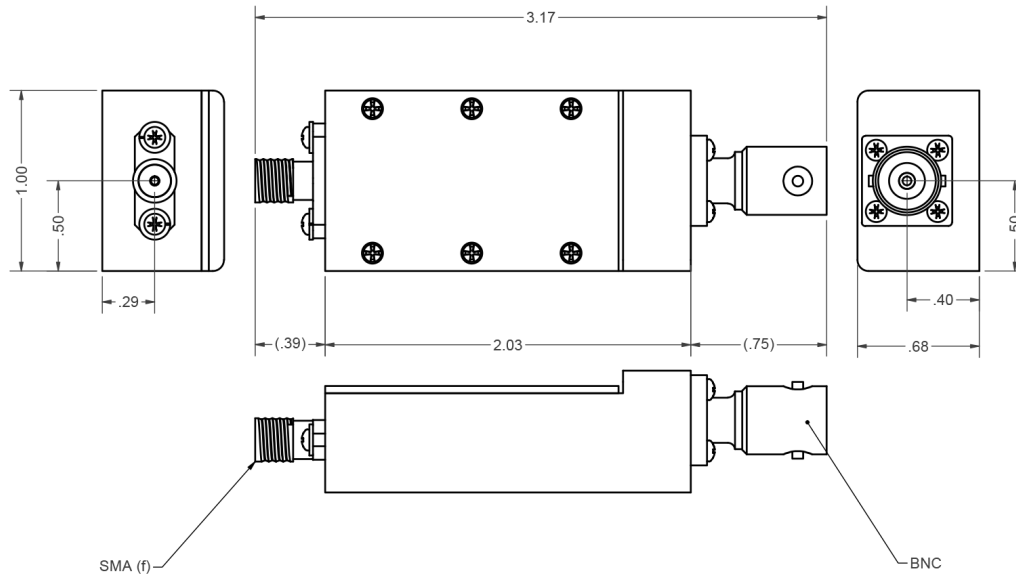

Wireless Telecom Group Inc.
 25 Eastmans Rd
 Parsippany, NJ
 United States
 Tel: +1 973 386 9696
 Fax: +1 973 386 9191
 noise.com

© Copyright 2018
 All rights reserved.

N/NC3600/0922/EN
 Note: Specifications, terms and conditions are subject to change without prior notice.